




# ORKSA

JENERATÖR

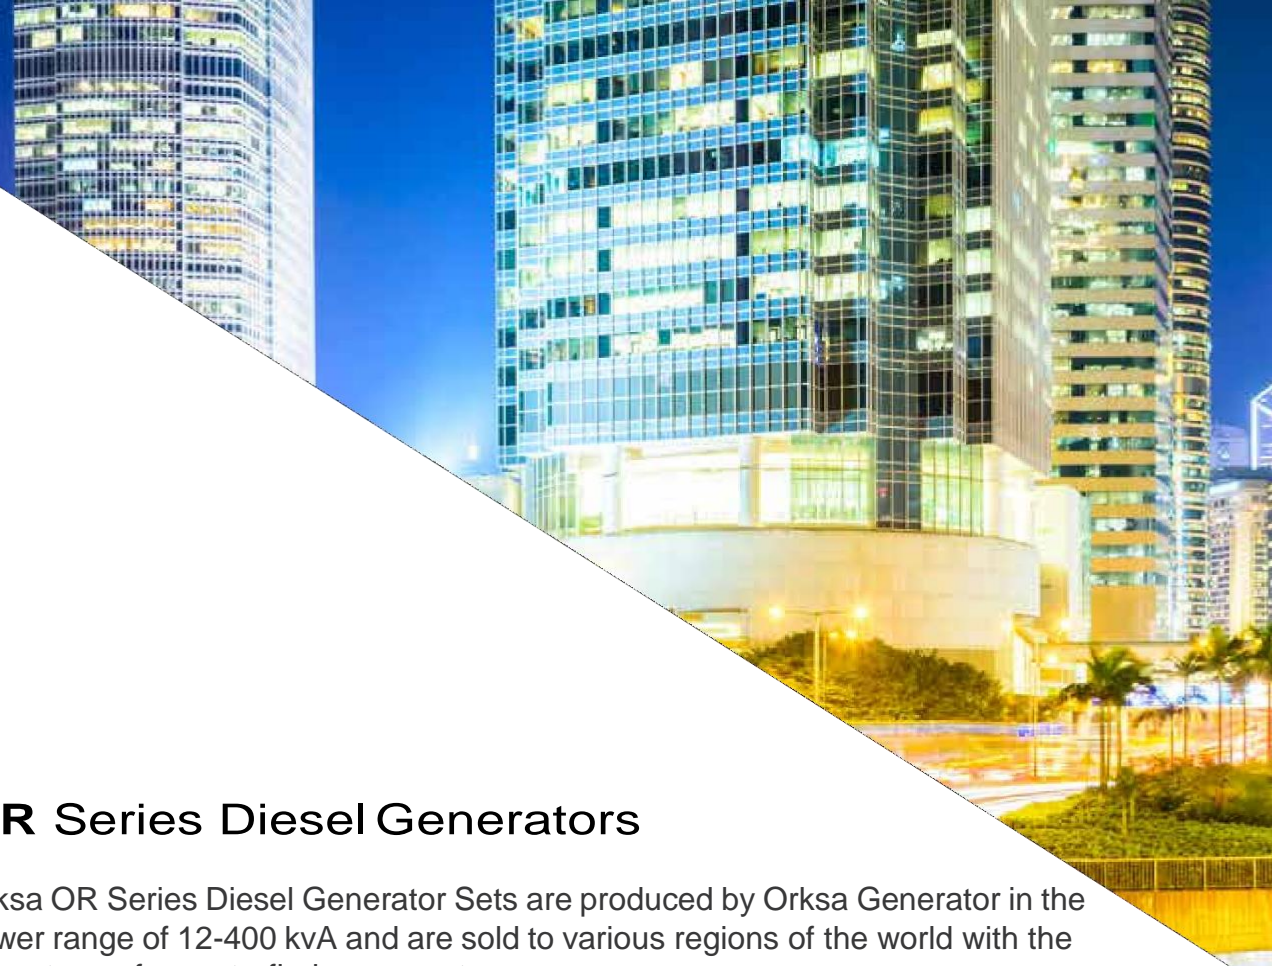

OR

## OR Series Diesel Generators



12-400  
kVA

Orksa OR Series Diesel Generator Sets are produced by Orksa Generator in the power range of 12-400 kVA and are sold to various regions of the world with the advantage of easy-to-find spare parts.

It is the most preferred generator by the buyers especially when it is evaluated at the price-performance point.

Turkey  
Discover  
the potential



**Standart Features**

- Flexible oil pipes and oil draining valve
- Pre-heater
- Lubrication oil and anti-freeze
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis
- Electronic battery charger

**Output Values**

**Standby Power**

kVA	kW
22	17,6

**Prime Power**

kVA	kW
19,8	15,8

**Diesel Engine**

Cutting edge motor brands are used that are compatible with ISO 8528, ISO 3046, BS 5514, DIN 6271 standards, with their low fuel consumption, fuel pump mounted, mechanic and electronic type governor.

Brand		YANGDONG
Model		485D
Max. Total Output Power	kWm / hp	17/23
Cylinder Displacement	lt	2,043
Cylinder Orientation		4 Single Line
Bore x Stroke	mm*mm	85*95
Compression Ratio		18:01
Governor Type		Mechanic
Rotation	rpm	1500 RPM
Aspiration System		Natural
Injection		Direct
Cooling System		Water Cooled
Electrical System	V DC	12
Oil Capacity	lt	8
Engine Coolant Capacity	lt	14
Fuel Consumption %50	lt/h	2,41
Fuel Consumption %75	lt/h	3,9
Fuel Consumption %100	lt/h	5,28

\*Orksa Generator reserves its right to change the specifications and cabin sizes in advance due to the continuing developments in the generator technology without any prior notification.

**Alternator**

4 poles, self-excitation, brushless, synchro type alternator, electronic type voltage regulator with a maintenance-free bearing system that enables precision voltage adjustment.

Output Voltage	V	230/400
Frequency	Hz	50
Stationary Vol. Regulation	±	1%
Short Circuit Current		%300 (100 sec)
Insulation		H
Protection		IP23
Excitation System		AVR BRUSHLESS
Eficiency	(%)	88
Overloading		110% for 1 hour
Power Factor	(cos Q=0.8)	0,8
Tot. Harmonic Dist. Rate		<3 %
Connection Type		Star
Number of Pole		4
Number of Bearing		Single

**Dimensions**

**Genset With Canopy**

Width(mm)	Length(mm)	High(mm)	Weight(kg)
90	2100	1400	650

1550

900

2000

1610

900

2300

\*Orksa Generator reserves its right to change the specifications and cabin sizes in advance due to the continuing developments in the generator technology without any prior notification.



## Optional Features

- Soundproof canopy
- Transfer switch
- Fuel sedimentary filter
- Alternator output switch
- Heating system for fuel tank
- Oil heater
- External fuel tank and transfer pump
- Remote control and monitoring
- Synchronization systems
- Special type exhaust muffler
- Trailer

## Control Panel Features



- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- 16 Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analog inputs
- CANBUS-J1939 & MPU input
- 3 configurable service alarms
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual 'speed fine adjust' on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics
- Configurable through USB, RS-232 and GPRS
- Free configuration software
- SMS controls enabled
- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connection (RS232)
- USB firmware upgrade
- IP65 rating with standard gasket

