




ORKSA

JENERATÖR

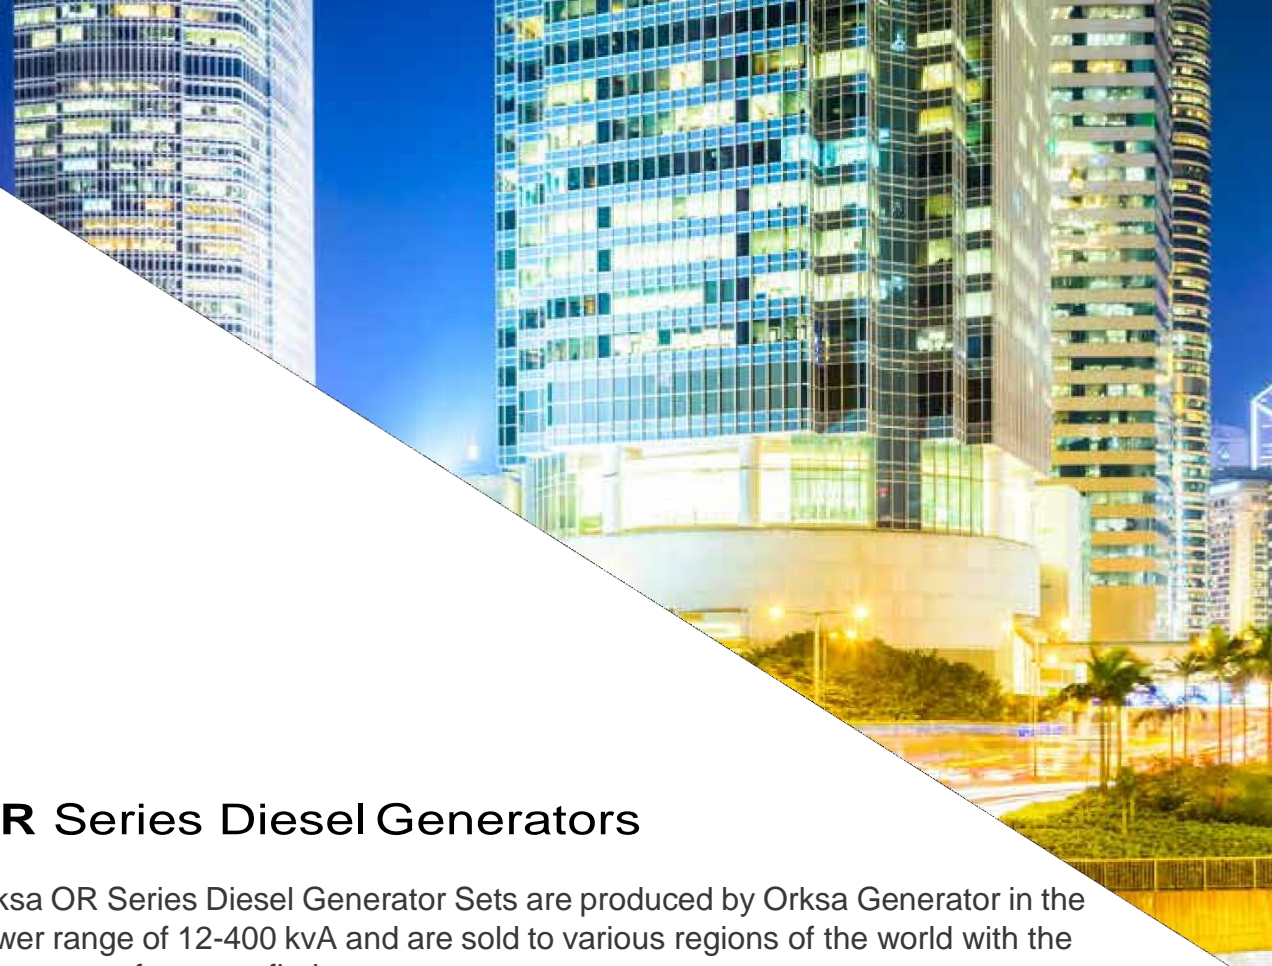

OR



12-400
kVA

OR Series Diesel Generators

Orksa OR Series Diesel Generator Sets are produced by Orksa Generator in the power range of 12-400 kVA and are sold to various regions of the world with the advantage of easy-to-find spare parts.

It is the most preferred generator by the buyers especially when it is evaluated at the price-performance point.

Turkey
Discover
the potential



Standart Features

- Flexible oil pipes and oil draining valve
- Pre-heater
- Lubrication oil and anti-freeze
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis
- Electronic battery charger

Output Values

Standby Power

| kVA | kW |
|-----|----|
| 75 | 60 |

Prime Power

| kVA | kW |
|-----|----|
| 68 | 54 |

Diesel Engine

Cutting edge motor brands are used that are compatible with ISO 8528, ISO 3046, BS 5514, DIN 6271 standards, with their low fuel consumption, fuel pump mounted, mechanic and electronic type governor.

| | | |
|-------------------------|----------|---------------|
| Brand | | RICARDO |
| Model | | R4105ZD |
| Max. Total Output Power | kWm / hp | 61,6/83 |
| Cylinder Displacement | lt | 4,33 |
| Cylinder Orientation | | 4 Single Line |
| Bore x Stroke | mm*mm | 105*125 |
| Compression Ratio | | 16:01 |
| Governor Type | | Mechanic |
| Rotation | rpm | 1500 RPM |
| Aspiration System | | Turbo charge |
| Injection | | Direct |
| Cooling System | | Water Cooled |
| Electrical System | V DC | 12/24 |
| Oil Capacity | lt | 14 |
| Engine Coolant Capacity | lt | 19 |
| Fuel Consumption %50 | lt/h | 7,1 |
| Fuel Consumption %75 | lt/h | 10,9 |
| Fuel Consumption %100 | lt/h | 14,3 |

Alternator

4 poles, self-excitation, brushless, synchro type alternator, electronic type voltage regulator with a maintenance-free bearing system that enables precision voltage adjustment.


| | | |
|----------------------------|-------------|-----------------|
| Standby Power | kVa / kW | 75/60 |
| Prime Power) | kVa / kW | 67/54 |
| Brand | | TWG |
| Output Voltage | V | 230/400 |
| Frequency | Hz | 50 |
| Stationary Vol. Regulation | ± | 1% |
| Short Circuit Current | | %300 (100 sec) |
| Insulation | | H |
| Protection | | IP23 |
| Eficiency | (%) | 88,6 |
| Overloading | | 110% for 1 hour |
| Power Factor | (cos Q=0.8) | 0,8 |
| Tot. Harmonic Dist. Rate | | <3 % |
| Connection Type | | Star |
| Number of Pole | | 4 |
| Number of Bearing | | Single |

Dimensions

Genset With Canopy

| Width(mm) | Length(mm) | High(mm) | Weight(kg) |
|-----------|------------|----------|------------|
| 90 | 2400 | 1600 | 1150 |

1550

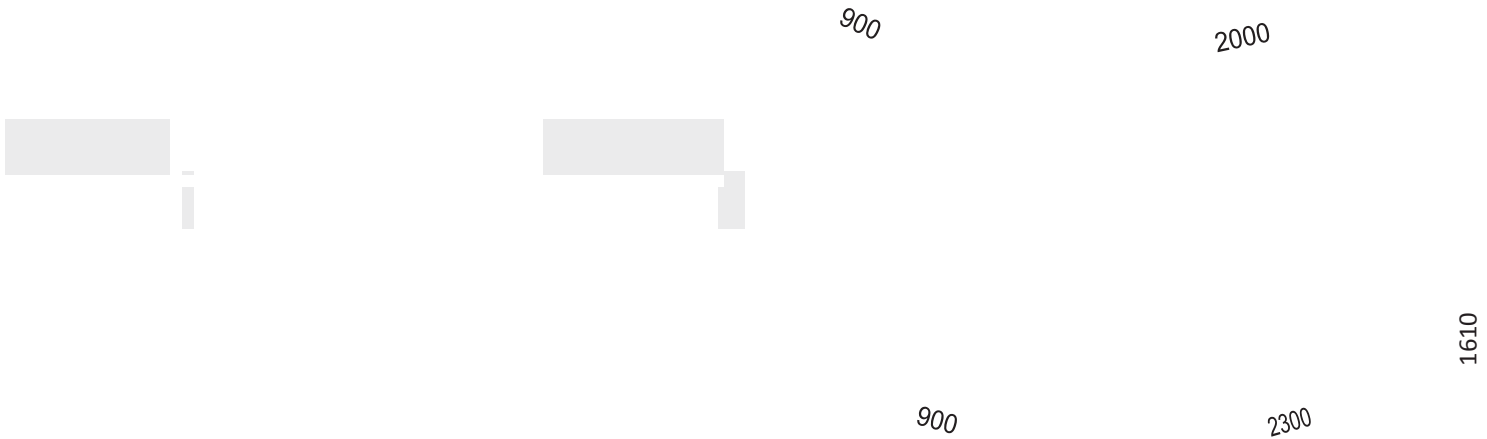

1610

*Orksa Generator reserves its right to change the specifications and cabin sizes in advance due to the continuing developments in the generator technology without any prior notification.

Optional Features

- Soundproof canopy
- Transfer switch
- Fuel sedimentary filter
- Alternator output switch
- Heating system for fuel tank
- Oil heater
- External fuel tank and transfer pump
- Remote control and monitoring
- Synchronization systems
- Special type exhaust muffler
- Trailer

Control Panel Features



- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V&I
- Harmonic analysis of V&I
- 16 Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analog inputs
- CANBUS-J1939 & MPU input
- 3 configurable service alarms
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual 'speed fine adjust' on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics
- Configurable through USB, RS-232 and GPRS
- Free configuration software
- SMS controls enabled
- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connection (RS232)
- USB firmware upgrade
- IP65 rating with standard gasket

