



TMG POWER

www.tmgpower.com.tr



PERKINS DIESEL GENSET

TMG-P 330

GROUP

		Standby Power	Prime Power
Power	kVA	330	300
Power	kW	264	240
Engine Speed	rpm	1500	
Standard Voltage	V	400 / 230	
Power Factor	Cos Phi	0,8	

Continuous Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a constant electrical load. Average load can be 100%. The generator must not be overloaded.

Standby Power

The maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 hrs of operation per year under average of 70% load. Overloading isn't permissible.

Prime Power

The maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hrs.

 Perkins

Mermerciler Sanayi Sitesi 3. Cadde No: 7 / B Beylikduzu / ISTANBUL / TURKEY

+90 212 641 94 21 | info@tmgpower.com.tr

www.tmgpower.com.tr

 TMG POWER


Engine Properties

Brand		Perkins
Model		1506A-E88TAG5
Medicine		Direct Injection
Prime Power	<i>kW</i>	267
Standby Power	<i>kW</i>	293
Cylinder Volume	<i>L</i>	8,8
Number of Cylinders		6 L
Aspiration		Turbo Charge ACC
Cooling system		Water Cooled
Heater Power	<i>Watt</i>	2000W
Broke & Stroke	<i>mmxmm</i>	112x149
Governor		Electronic
Working Capacity at Full Load	<i>g/kWh</i>	196
Oil Capacity	<i>lt.</i>	41
Water Capacity	<i>lt.</i>	29,6
Voltage	<i>V</i>	24
Battery Capacity	<i>A</i>	2X105

Alternator Properties


Output Voltage	<i>V</i>	230/400
Frequency	<i>HZ</i>	50
Automatic Voltage Regulation	$\pm\%$	0,5
Stand by Power	<i>kVA</i>	330
Prime Power	<i>kVA</i>	300
Power Factor	<i>Cosq</i>	0,8
Number of Cables		12
Winding Line		2/3
Protection Class		IP23 / H
Warning System		Self-Alert
AVR Model		SX440
Alternator Efficiency	<i>%</i>	92

Diemensions

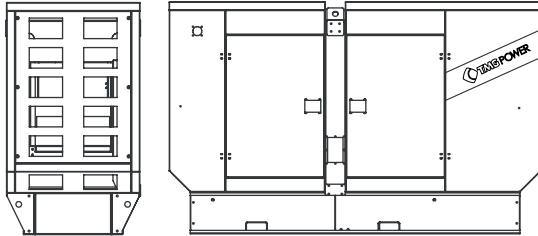

Canopied

L x W x H	<i>mm</i>	3680x1200x2000
Weight	<i>kg</i>	3130
Fuel Tank Capacity	<i>lt.</i>	368

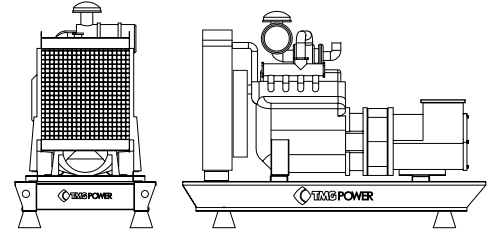

Open Set

L x W x H	<i>mm</i>	3380x1200x1600
Weight	<i>kg</i>	2605
Fuel Tank Capacity	<i>lt.</i>	368

Optitonal

Some Optional Equipments that TMG POWER provides with Generator Sets;

- Medium voltage alternator,
- Remote radiator applications,
- Automatic fuel filling system,
- Fuel tank, oil pan, dashboard, alternator, coil heaters,
- Alternator with double AVR and PMG,
- Synchronization systems, The generator output breaker,
- Grid-generator transfer switches,
- Accordance with the specific volume of demand-insulated cabins,
- Seismic solutions,
- Remote monitoring.
- SMPS 12/24V 10A

Kontrol Panel

- Datakom D500
- Datakom D700
- ComAp AMF9
- ComAp AMF25